



Eco-Safe 1.33
Eco-Safe 2.0
Eco-Safe 4.0

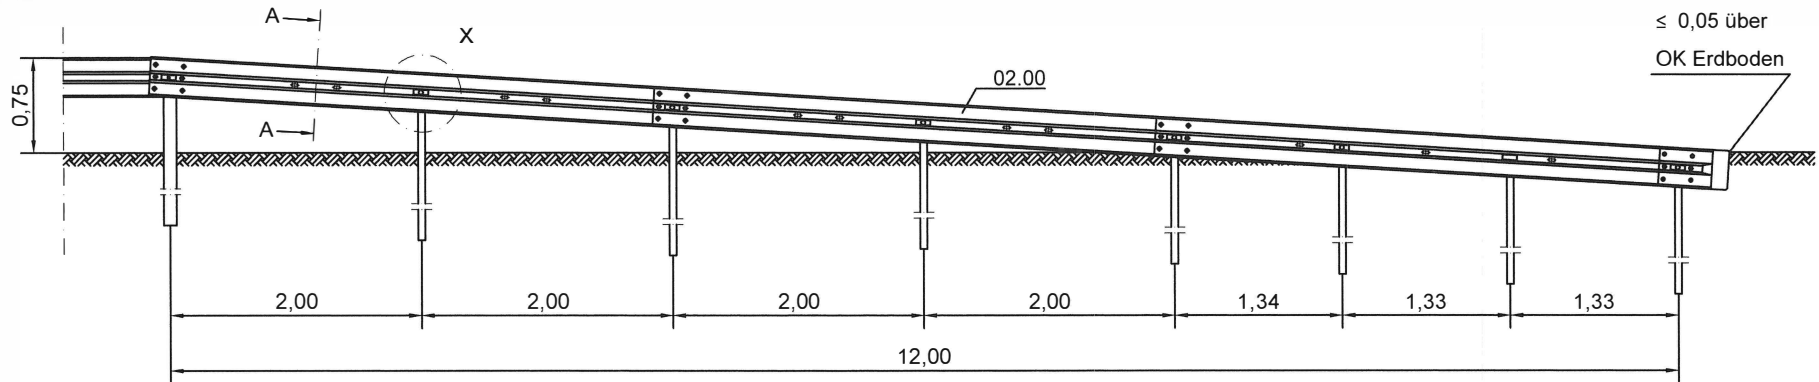


- | | | | | | | | |
|--------------------------------------|--|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| Pfosten 8
C-100/60
L= 1.700 mm | Pfosten 7
Sigma
L= 1.900 mm
entfällt bei Eco-Safe 4.0 | Pfosten 6
Sigma
L= 1.900 mm | Pfosten 5
Sigma
L= 1.900 mm | Pfosten 4
Sigma
L= 1.500 mm | Pfosten 3
Sigma
L= 1.500 mm | Pfosten 2
Sigma
L= 1.500 mm | Pfosten 1
Sigma
L= 1.500 mm |
|--------------------------------------|--|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|

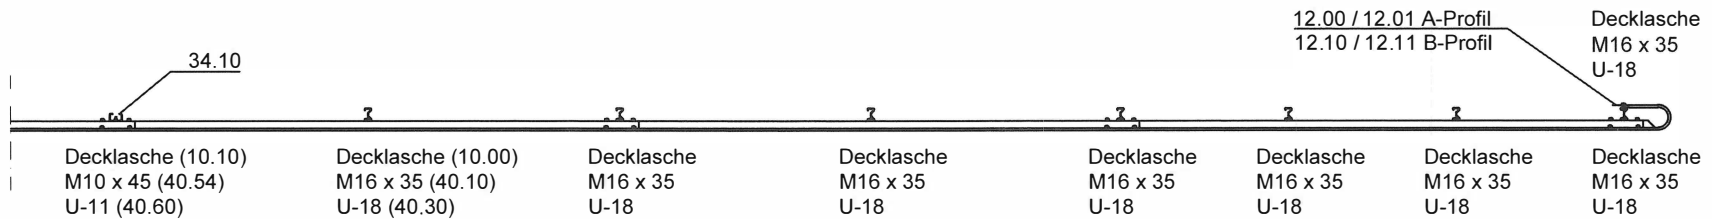


Pfostenverschraubung

Detail X

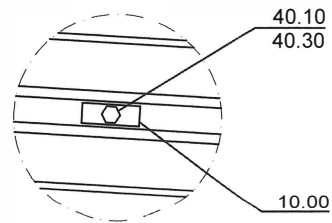

Schnitt A-A



Profil A sinngemäß ausführen

Zchg. Nr. S4.1-420

Stand: Sept. 2019

Eco-Safe Absenkungen

DIN V ENV 1317-4

P2A- x1/y1- Z1- A



Gütegemeinschaft Stahlschutzplanken e.V.

S4.1-420

RAL-RG 620