




Super-Rail ES 1.00

Dated: 20.10.2020

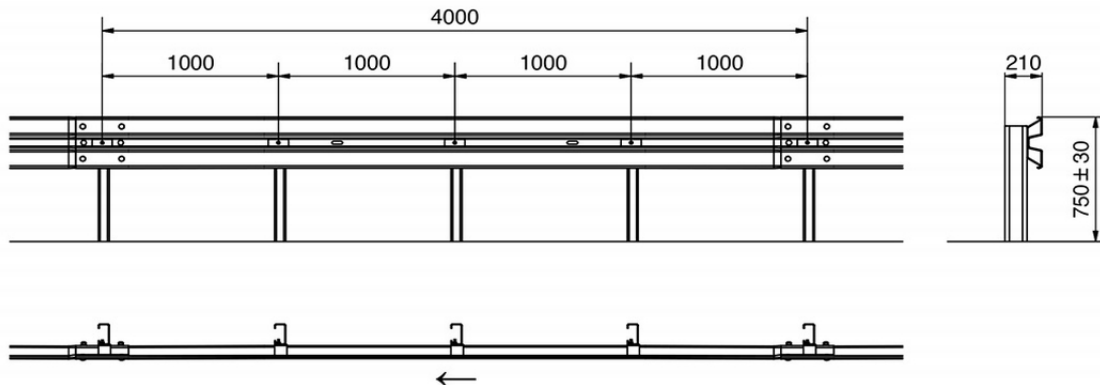

The single-sided vehicle restraint system for installation on driven posts is composed of galvanised components acc. to RAL-RG 620. The lengths of the beams and posts determine the shape of each segment. The system is characterised by its beams of 4 m length and a post spacing of 1,00 m. The joints of the guardrail beams overlap in direction of traffic. They are connected to each other by multiple screwings and fixed to the posts together with support brackets.

<i>System Name</i>	Super-Rail ES 1.00
<i>CE Certificate of Performance</i>	0052-CPR-2011
<i>Initial Type Tests</i>	TB11: X53.06.K08 (TÜV Süd GmbH, 2007) TB32: X53.07.K08 (TÜV Süd GmbH, 2007) TB42: X53.05.K08 (TÜV Süd GmbH, 2010)
<i>Typical Material</i>	Steel S235 JR
<i>System Width</i>	0,20 m
<i>System Height (from Road Surface)</i>	0,75 m
<i>System Length (Unit)</i>	4,00 m
<i>Weight per m of System Length</i>	31,8 kg (A) 30,8 kg (B)
<i>Installation Length</i>	60 m
<i>Tested Installing Method</i>	driven posts

Performance acc. to EN 1317

<i>Containment Level</i>	N2 H1 L1
<i>Working Width</i>	W2 W2 W2 (W _N = 0,7 m 0,8 m 0,8 m)
<i>Impact Severity Level</i>	A
<i>Dynamic Deflection</i>	D _N = 0,5 m 0,7 m 0,7 m
<i>Vehicle Intrusion</i>	H1/L1: VI5 (V _N =1,4 m)
<i>Resistance Class Snow Removal</i>	3

*) NPD = no performance determined